



YFC-BONEAGLE



岳豐科技股份有限公司
YFC-BONEAGLE ELECTRIC., LTD.

臺灣地址：

桃園縣327新屋鄉中山東路二段130巷12-9號
NO.12-9, 130th LANE, SECTION 2, CHUNG SHAN
E. ROAD, HSIN WU, TAOYUAN 327, TAIWAN

TEL: + 886-3-4778846

FAX: + 886-3-4779210

Http://www.cables.com.tw

E-mail: yfcbe_sales@cables.com.tw

大陸地址：

廣東省東莞市石碣鎮涌口工業區
CHUNGKOU INDUSTRIAL DISTRICT,
SHIJIE, DONGGUAN, GUANGDONG, CHINA

TEL: + 86-769-81837666, 86315345, 86631260

FAX: + 86-769-86631940, 86317786

Http://www.yfc-china.com

E-mail: yfcgdg@yfc-china.com

Post code: 523299

CONTENTS



POWER SUPPLY CORD SERIES

*UL&CSA POWER SUPPLY CORD SERIES	1-20
*EUROPE POWER SUPPLY CORD SERIES	21-24
*AUSTRALIA POWER SUPPLY CORD SERIES	25
*JAPAN POWER SUPPLY CORD SERIES	26-27
*CHINA POWER SUPPLY CORD SERIES	28
*OTHERS	29




CORD SET SERIES 30-39



LIGHTING STRING AND POWER OUTLET STRING SERIES 40



PORTABLE HAND LAMP SERIES 41



WIRE SERIES 42-59



TECHNICAL INFORMATION 60-64



AUSTRIA



POLAND



BELGIUM



BRITISH



DENMARK



FRANCE



FINLAND



AUSTRALIA



ITALY



JAPAN



HOLLAND



CHINA



SWEDEN



AMERICA



SWITZERLAND



CANADA



GERMANY



NORWAY

RUNNING PHILOSOPHY

Excellence: Professionalism of technology; Excellent in product quality.

Innovation: Innovation of creating products with new ideas.

Honesty: Honesty to employees; Honesty to customers.

Integrity: Operating in austerity; Endlessly endeavoring.



Email: yfcdg@yfc-china.com

<http://www.yfc-china.com>



Innovation • Servings • Participate

POWERSUPPLY CORDSERIES





YFC-BONEAGLE

UL&CSA POWER SUPPLY CORD SERIES

SF-21(P)

NEMA 1-15P
15A, 125V
P stands for polarized



Wire Type:

20AWG × 2C: SPT-1, XT
18AWG × 2C: SPT-1, SPT-1W, SPT-2, SPT-2W,
HPN, NISPT-1, NISPT-2
16AWG × 2C: SPT-2, SPT-2W, HPN

SF-22A(P)

NEMA 1-15P
15A, 125V
P stands for polarized



Wire Type:

18AWG × 2C: SPT-2, SJT

SF-23(P)

NEMA 1-15P
15A, 125V
P stands for polarized



Wire Type:

18AWG × 2C: SVT, SVTO, SJT, SJTO, SJTW
17AWG × 2C: SVT
16AWG × 2C: SVT, SVTO, SJT, SJTO, SJTW
14AWG × 2C: SJT, SJTO, SJTW

SF-23C(P)

NEMA 1-15P
15A, 125V
With grip
P stands for polarized



Wire Type:

18AWG × 2C: SVT, SVTO, SJT, SJTO, SJTW
17AWG × 2C: SVT
16AWG × 2C: SVT, SVTO, SJT, SJTO, SJTW
14AWG × 2C: SJT, SJTO, SJTW

SF-31

NEMA 5-15P
15A, 125V



Wire Type:

18AWG × 3C: SJT, SJTSHD, SJTW, SVT, SVTSHD,
SVTO, SPT-1, SPT-2
16AWG × 3C: SJT, SJTSHD, SJTW, SJTO, SPT-2,
SVT, SVTO
14AWG × 3C: SJT, SJTSHD, SJTO, SJTW



YFC-BONEAGLE

UL&CSA POWER SUPPLY CORD SERIES

SF-3IC

NEMA 5-15P
15A, 125V
With grip



Wire Type:

18AWG × 3C: SJT, SJTSHD, SJTW, SVT, SVTSHD, SVTO, SPT-1, SPT-2
16AWG × 3C: SJT, SJTSHD, SJTW, SJTO, SPT-2, SVT, SVTO
14AWG × 3C: SJT, SJTSHD, SJTO, SJTW

SF-3IL

NEMA 5-15P
15A, 125V



Wire Type:

18AWG × 3C: SJT, SJTWS, JTO, SJTOO, SJTOW, SJTOOW, STO, STOO, STOW, STOOW, SPT-3
16AWG × 3C: SJT, SJTWS, JTO, SJTOO, SJTOW, SJTOOW, SJEOW, STO, STOO, STOW, STOOW, SPT-3
14AWG × 3C: SJT, SJTWS, JTO, SJTOO, SJTOW, SJTOOW, SJEOW, ST, STW, STO, STOO, STOW, STOOW, SPT-3
12AWG × 3C: SJT, SJTWS, JTO, SJTOO, SJTOW, SJTOOW, SJEOW, SJEOW, ST, STW, STO, STOO, STOW, STOOW, SPT-3
10AWG × 3C: SJT, SJTWS, JTO, SJTOO, SJTOW, SJTOOW, SJEOW, ST, STW, STO, STOO, STOW, STOOW, SPT-3

SF-3IM

NEMA 5-15P
15A, 125V



Wire Type:

16AWG × 3C: SJTW, SJTOW, SJEOW, SEOW
14AWG × 3C: SJTW, SJTOW, SJEOW, SEOW, STW
12AWG × 3C: SJTW, SJTOW, SJEOW, SEOW, STW
10AWG × 3C: SJTW, SJEOW, STW

SF-3IN

NEMA 5-15P
15A, 125V



Wire Type:

18AWG × 3C: ST, STW
16AWG × 3C: SPT-2, ST, STW
14AWG × 3C: SPT-3, ST, STW
12AWG × 3C: SPT-3, SJT, SJTW, ST, STW
10AWG × 3C: SPT-3, SJT, SJTW

SF-3IS

NEMA 5-15P
15A, 125V



Wire Type:

18AWG × 3C: SJT, SJTW, SJTO, SJTOO, SJTOW, SJTOOW, SJEOW, SJEOW, ST, STO, STOW, STOO, STOOW, SPT-1, SPT-2, SPT-3
16AWG × 3C: SJT, SJTW, SJTO, SJTOO, SJTOW, SJTOOW, SJEOW, SJEOW, ST, STO, STOW, STOO, STOOW, SPT-1, SPT-2, SPT-3
14AWG × 3C: SJT, SJTW, SJTO, SJTOO, SJTOW, SJTOOW, SJEOW, SJEOW, ST



YFC-BONEAGLE

UL&CSA POWER SUPPLY CORD SERIES

UL&CSA POWER SUPPLY CORD SERIES

SF-32

NEMA 5-15P
15A, 125V



Wire Type:

18AWG × 3C: SJT, SJTW, SPT-2, SPT-3, SVT, ST, STW
16AWG × 3C: SJT, SJTW, SPT-3, ST, STW
14AWG × 3C: SJT, SJTW, SPT-3, ST, STW

SF-32A

NEMA 5-15P
15A, 125V



Wire Type:

14AWG × 3C: SPT-3, ST, STW
12AWG × 3C: SPT-3, SJT, SJTW, ST, STW
10AWG × 3C: SPT-3, SJT, SJTW

SF-32D

NEMA 5-15P
15A, 125V



Wire Type:

18AWG × 3C: SJT, SPT-2, SPT-3, SVT
16AWG × 3C: SJT, SPT-3
14AWG × 3C: SJT, SPT-3

SF-33

NEMA 5-15P
15A, 125V
Hospital plug



Wire Type:

18AWG × 3C: SJT, SJTSHD, SVT, SVTSHD, ST, STW
16AWG × 3C: SJT, SJTSHD, SVT, SVTSHD, ST, STW
14AWG × 3C: SJT, ST, STW
12AWG × 3C: SJT

SF-37

NEMA 5-20P
20A, 125V



Wire Type:

14AWG × 3C: SJT, SJTW
12AWG × 3C: SJT, SJTW



YFC-BONEAGLE

UL&CSA POWER SUPPLY CORD SERIES

UL&CSA POWER SUPPLY CORD SERIES

SF-39

NEMA5-15P
15A, 125V



Wire Type:

18AWG × 3C: SJT, SJTW
16AWG × 3C: SJT, SJTW
14AWG × 3C: SJT, SJTW

SF-40

NEMA5-15P
15A, 125V




Wire Type:

18AWG × 3C: SJT, SJTW
16AWG × 3C: SJT, SJTW
14AWG × 3C: SJT, SJTW

SF-40A

NEMA5-15P
15A, 125V



Wire Type:

18AWG × 3C: SJT, SJTW, SVT
16AWG × 3C: SJT, SJTW, SVT
14AWG × 3C: SJT, SJTW

SF-4I

NEMA 5-20P
20A, 125V



Wire Type:

18AWG × 3C: SJT, SJTW, SPT-3
16AWG × 3C: SJT, SJTW, SPT-3
14AWG × 3C: SJT, SJTW, SPT-3

SF-4IL

NEMA5-20P
20A, 125V



Wire Type:

16AWG × 3C: ST, STW
14AWG × 3C: ST, STW
12AWG × 3C: ST, STW
10AWG × 3C: SJT, SJTW, SJTOW, SJEOW, ST, STW




YFC-BONEAGLE

UL&CSA POWER SUPPLY CORD SERIES

SF-42

NEMA 6-20P
20A, 250V



Wire Type:

18AWG × 3C: SJT, SJTW, SPT-3
16AWG × 3C: SJT, SJTW, SPT-3
14AWG × 3C: SJT, SJTW, SPT-3
12AWG × 3C: SJT, SJTW, SPT-3

SF-42L

NEMA 6-20P
20A, 250V




Wire Type:

16AWG × 3C: ST, STW
14AWG × 3C: ST, STW
12AWG × 3C: ST, STW
10AWG × 3C: SJTOW, SJEOW

SF-43

NEMA 6-15P
15A, 250V



Wire Type:

18AWG × 3C: SJT, SJTW, SPT-2, SPT-3, SVT
16AWG × 3C: SJT, SJTW, SPT-2, SPT-3
14AWG × 3C: SJT, SJTW, SPT-3
12AWG × 3C: SJT, SJTW

SF-44

NEMA 5-30P
30A, 125V



Wire Type:

14AWG × 3C: SJT, SJTW
12AWG × 3C: SJT, SJTW
10AWG × 3C: SJT, SJTW

SF-45

NEMA 5-15P
15A, 125V



Wire Type:

14AWG × 3C: SJT, SJTSHD



YFC-BONEAGLE

UL&CSA POWER SUPPLY CORD SERIES

UL&CSA POWER SUPPLY CORD SERIES

SF-46

NEMA 5-15P
15A, 125V



Wire Type:
14AWG × 3C: SJT, SJT SHD

SF-47


NEMA 5-15P
15A, 125V



Wire Type:
14AWG × 3C: SJT, SJTW

SF-48

NEMA 5-15P
15A, 125V
With circuit breaker



Wire Type:
18AWG × 3C: SJT, SVT

SF-48A

NEMA 5-15P
15A, 125V
With circuit breaker



Wire Type:
18AWG × 3C: SJT, SVT

SF-49

NEMA 5-15P
15A, 125V
With circuit breaker



Wire Type:
14AWG × 3C: SJTW
12AWG × 3C: SJTW



YFC-BONEAGLE

UL&CSA POWER SUPPLY CORD SERIES

UL&CSA POWER SUPPLY CORD SERIES

SF-50

NEMA 5-15R
15A, 125V



Wire Type:
14AWG × 3C: SJTW
12AWG × 3C: SJTW

SF-51

NEMA 1-15R
15A, 125V



Wire Type:
18AWG × 2C: SPT-1, SPT-2
16AWG × 2C: SPT-2

SF-51N

NEMA 1-15R
15A, 125V



Wire Type:
18AWG × 2C: SPT-1, SPT-2
16AWG × 2C: SPT-2

SF-52

NEMA 5-15R
15A, 125V



Wire Type:
18AWG × 3C: SJT, SJTW, SPT-1, SVT
16AWG × 3C: SJT, SJTW, SPT-2, SVT
14AWG × 3C: SJT, SJTW, SPT-3
12AWG × 3C: SJT, SJTW

SF-52M

NEMA 5-15R
15A, 125V



Wire Type:
16AWG × 3C: SJTW, SJTOW, SJEOW, SEOW
14AWG × 3C: SJTW, SJTOW, SJEOW, SEOW, STW
12AWG × 3C: SJTW, SJTOW, SJEOW, SEOW, STW
10AWG × 3C: SJTW, SJEOW, STW



YFC-BONEAGLE

UL&CSA POWER SUPPLY CORD SERIES

UL&CSA POWER SUPPLY CORD SERIES

SF-52N

NEMA 5-15R
15A, 125V



Wire Type:

18AWG × 3C: SJTO, SJTOO, SJTOW, SJTOOW, STO, STOO, STOW, STOOW
16AWG × 3C: SJTO, SJTOO, SJTOW, SJTOOW, STO, STOO, STOW, STOOW
14AWG × 3C: SJTO, SJTOO, SJTOOW, ST, STW, STO, STOO, STOW, STOOW
12AWG × 3C: SJTO, SJTOO, SJTOOW, ST, STW, STO, STOO, STOW, STOOW
10AWG × 3C: SJT, SJTW, SJTO, SJTOO, SJTOW, SJTOOW, SJEOW, ST, STW, STO, STOO, STOW, STOOW, SEO

SF-52S

NEMA 5-15R
15A, 125V



Wire Type:

18AWG × 3C: SJT, SJTW, SJTOW, SJEOW, ST, SJE
16AWG × 3C: SJT, SJTW, SJTOW, SJEOW, ST, SJE
14AWG × 3C: SJT, SJTW, SJTOW, SJEOW, ST, SJE

SF-523D

NEMA 5-15R
15A, 125V



Wire Type:

16AWG × 3C: SJE, SJEW, SJEOW, SJEOW, SJEOW, SJEOW
14AWG × 3C: SJE, SJEW, SJEOW, SJEOW, SJEOW, SJEOW

SF-523F

NEMA 5-15R
15A, 125V




Wire Type:

16AWG × 3C: SPT-2, SJT, SJTW
14AWG × 3C: SPT-2, SJT, SJTW
12AWG × 3C: SJT, SJTW

SF-523G

NEMA 5-15R
15A, 125V



Wire Type:

16AWG × 3C: SJTW, STW
14AWG × 3C: SJTW, SJTOW, STW, STOW, SJEOW, SEOW
12AWG × 3C: SJTW, SJTOW, STW, STOW, SJEOW, SEOW
10AWG × 3C: SJTW, SJTOW, ST, SJEOW



YFC-BONEAGLE

UL&CSA POWER SUPPLY CORD SERIES

UL&CSA POWER SUPPLY CORD SERIES

SF-523S

NEMA 5-15R
15A, 125V




Wire Type:

16AWG × 3C: SJT, SJTW, SPT-2
14AWG × 3C: SJT, SJTW, SPT-3
12AWG × 3C: SJT, SJTW

SF-53

NEMA 1-15R
15A, 125V



Wire Type:

18AWG × 2C: SPT-1, SPT-2, SVT, SJT, SJTW
16AWG × 2C: SPT-2, SJT, SJTW
14AWG × 2C: SJTW

SF-54

NEMA 5-20R
20A, 125V



Wire Type:

10AWG × 3C: SJTOW, SJEOW

SF-55

NEMA 6-20R
20A, 250V



Wire Type:

10AWG × 3C: SJTOW, STOW, SJEOW, SOW
12AWG × 3C: SPT-3

SF-56

NEMA 5-15R
15A, 125V



Wire Type:

16AWG × 3C: SJT, SJTW, ST, STW
14AWG × 3C: SJT, SJTW, ST, STW
12AWG × 3C: SJT, SJTW, ST, STW
10AWG × 3C: SJT, SJTW, ST, STW

UL&CSA POWER SUPPLY CORD SERIES

SF-56M

NEMA 5-15R
15A, 125V



Wire Type:

16AWG × 3C: SJTW, SJTOW, SJEOW, SEOW
14AWG × 3C: SJTW, SJTOW, SJEOW, SEOW, STW
12AWG × 3C: SJTW, SJTOW, SJEOW, SEOW, STW
10AWG × 3C: SJTW, SJEOW, STW

SF-58

C3.1
30A, 125V




Wire Type:

10AWG × 3C: STW

SF-59

C3.1
30A, 125V



Wire Type:

10AWG × 3C: STW

SF-60

7A, 125V



Wire Type:

18AWG × 2C: SJT, SVT

SF-62

7A, 125V



Wire Type:

18AWG × 2C: SJT, SVT



YFC-BONEAGLE

UL&CSA POWER SUPPLY CORD SERIES

SF-63

7A, 125V



Wire Type:
UL1015 18AWG

SF-67

NEMA 5-15P
15A, 125V



Wire Type:
18AWG×3C: SJT, SJTW
16AWG×3C: SJT, SJTW
14AWG×3C: SJT, SJTW

SF-68

NEMA 6-50P
50A, 250V



Wire Type:
12AWG×3C: SPT-3
10AWG×3C: SPT-3
8AWG×3C: STW
6AWG×3C: STW

SF-69

NEMA 6-50R
50A, 250V



Wire Type:
6AWG×3C: STW

SF-70

Specialized in medical
use



Wire Type:
Parallel Wire 2.1×4.3mm



YFC-BONEAGLE

UL&CSA POWER SUPPLY CORD SERIES

SF-71


Specialized in medical use



Wire Type:
Parallel Wire 2.1×4.3mm

SF-72S

NEMA 14-50P
50A, 125/250V



Wire Type:
8AWG×2C+10AWG×2C: SRDT
6AWG×2C+8AWG×2C: SRDT
6AWG×3C+8AWG×1C: STW

SF-72R

NEMA 14-50R
50A, 125/250V



Wire Type:
10AWG×3C: STW
6AWG×3C+8AWG×1C: STW

SF-73S

NEMA 14-30P
30A, 125/250V



Wire Type:
10AWG×4C: SRDT

SF-74S

NEMA 10-30P
30A, 125/250V



Wire Type:
10AWG×3C: SRDT




YFC-BONEAGLE

UL&CSA POWER SUPPLY CORD SERIES

UL&CSA POWER SUPPLY CORD SERIES

SF-75S

NEMA 10-50P
50A, 125/250V

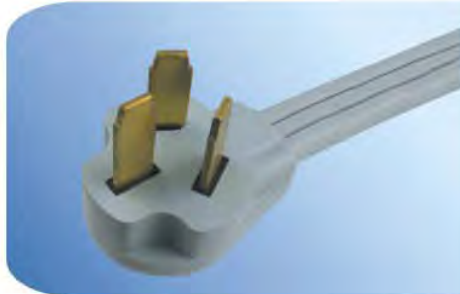

Wire Type:
8AWG × 2C + 10AWG × 1C: SRDT
6AWG × 2C + 8AWG × 1C: SRDT

SF-76

NEMA L5-20P
20A, 125V



Wire Type:
18AWG × 3C: SJTO, SJTOO, SJTOW, SJTOOW, STO, STOO, STOW, STOOW
16AWG × 3C: SJT, SJTW, SJTO, SJTOO, SJTOW, SJTOOW, SJEOW, ST, STW, STO, STOO, STOW, STOOW
14AWG × 3C: SJT, SJTW, SJTO, SJTOO, SJTOOW, ST, STW, STO, STOO, STOW, STOOW
12AWG × 3C: SJT, SJTW, SJTO, SJTOO, SJTOW, SJTOOW, SJEOW, ST, STW, STO, STOO, STOW, STOOW, SEOW
10AWG × 3C: SJT, SJTW, SJTO, SJTOO, SJTOW, SJTOOW, SJEOW, ST, STW, STO, STOO, STOW, STOOW

SF-77

NEMA L5-20R
20A, 125V



Wire Type:
18AWG × 3C: SJTO, SJTOO, SJTOW, SJTOOW, STO, STOO, STOW, STOOW
16AWG × 3C: SJT, SJTW, SJTO, SJTOO, SJTOW, SJTOOW, SJEOW, ST, STW, STO, STOO, STOW, STOOW
14AWG × 3C: SJT, SJTW, SJTO, SJTOO, SJTOOW, ST, STW, STO, STOO, STOW, STOOW
12AWG × 3C: SJT, SJTW, SJTO, SJTOO, SJTOW, SJTOOW, SJEOW, ST, STW, STO, STOO, STOW, STOOW, SEOW
10AWG × 3C: SJT, SJTW, SJTO, SJTOO, SJTOW, SJTOOW, SJEOW, ST, STW, STO, STOO, STOW, STOOW

SF-80

IEC 320-C14
10A, 250V



Wire Type:
18AWG × 3C: SJT, SJTW
16AWG × 3C: SJT, SJTW

SF-81

IEC 320-C14
15A, 125V



Wire Type:
18AWG × 3C: SJT, SJTSHD, SVT, SVTSHD
16AWG × 3C: SJT, SJTSHD
14AWG × 3C: SJT, SJTW



YFC-BONEAGLE

UL&CSA POWER SUPPLY CORD SERIES

SF-82

IEC 320-C13
15A, 125V



Wire Type:

18AWG × 3C: SJT, SJTSHD, SVT, SVTSHD
16AWG × 3C: SJT, SJTSHD
14AWG × 3C: SJT, SJTW, SJTSHD, SJTWSHD

SF-83

IEC 320-C13
15A, 125V



Wire Type:

18AWG × 3C: SJT, SJTSHD, SVT, SVTSHD
16AWG × 3C: SJT, SJTSHD
14AWG × 3C: SJT, SJTW, SJTSHD, SJTWSHD

SF-84

IEC 320-C13
15A, 125V



Wire Type:

18AWG × 3C: SJT, SVT
16AWG × 3C: SJT
14AWG × 3C: SJT

SF-85A

IEC 320-C7
10A, 125V



Wire Type:

18AWG × 2C: SPT-1, SPT-2, HPN

SF-85B

IEC 320-C7
10A, 125V



Wire Type:

18AWG × 2C: SPT-1, SPT-2, HPN, NISPT-1, NISPT-2



YFC-BONEAGLE

UL&CSA POWER SUPPLY CORD SERIES

UL&CSA POWER SUPPLY CORD SERIES

SF-85C

IEC 320-C7
10A, 125V




Wire Type:

18AWG × 2C: SPT-1, SPT-2, NISPT-1, NISPT-2

SF-86

10A, 125V




Wire Type:

18AWG × 2C: SVT
17AWG × 2C: SVT

SF-87

IEC 320-C5
10A, 125V



Wire Type:

18AWG × 3C: SPT-2, SJT, SJTSHD, SVT, SVTSHD

SF-87A

IEC 320-C5
10A, 125V




Wire Type:

18AWG × 3C: SPT-2, SVT, SJT

SF-88

10A, 125V



Wire Type:

18AWG × 2C: SVT



YFC-BONEAGLE

UL&CSA POWER SUPPLY CORD SERIES

SF-I33

7-way plug




Wire Type:

10AWG × 2C + 12AWG × 1C + 14AWG × 4C: AWM2586

SF-I34

NEMA5-15R
15A, 125V



Wire Type:

18AWG × 3C: SJTW, SJTOW, SJTOOW, STOW, STOOW,
16AWG × 3C: SPT-3, SJTW, SJTOW, SJTOOW, STOW,
STOOW, STW, SEOW, SJEOW
14AWG × 3C: SPT-3, SJTW, SJTOW, SJTOOW, STOW,
STOOW, STW, SEOW, SJEOW
12AWG × 3C: SPT-3, SJTW, SJTOW, SJTOOW, STOW,
STOOW, STW, SEOW, SJEOW
10AWG × 3C: SJTW, SJTOW, SJTOOW, STOW, STOOW,
STW, SEOW, SJEOW

SF-I4



Wire Type:

18AWG × 2C: SVT

SF-I50

NEMA5-20R
20A, 125V




Wire Type:

12AWG × 3C: SJTW, SJTOW, STW, STOW
10AWG × 3C: SJTW, SJTOW, STW, STOW

SF-I51

NEMA L5-30P
30A, 125V



Wire Type:

14AWG × 3C: SJT, SJTW, SJTO, SJTOO, SJTOW, SJTOOW,
ST, STW, STO, STOO, STOW, STOOW
12AWG × 3C: SJT, SJTW, SJTO, SJTOO, SJTOW, SJTOOW,
ST, STW, STO, STOO, STOW, STOOW
10AWG × 3C: SJT, SJTW, SJTO, SJTOO, SJTOW, SJTOOW,
ST, STW, STO, STOO, STOW, STOOW



YFC-BONEAGLE

UL&CSA POWER SUPPLY CORD SERIES

SF-I52

NEMA 5-15P
15A, 125V



Wire Type:

18AWG × 3C: SPT-2, SVT, SJT, SJTW, SJTO, SJTOW, SJE, SJEW, SJE0, SJEOW
16AWG × 3C: SPT-2, SVT, SJT, SJTW, SJTO, SJTOW, SJE, SJEW, SJE0, SJEOW
14AWG × 3C: SJT, SJTW, SJTO, SJTOW, SJE, SJEW, SJE0, SJEOW

SF-I53

NEMA 1-15P
15A, 125V



Wire Type:

18AWG × 2C: SPT-2
16AWG × 2C: SPT-2

SF-I54

Current tap



Wire Type:

18AWG × 2C: SPT-2
16AWG × 2C: SPT-2

SF-I55

NEMA L14-30P
30A, 250V



Wire Type:

10AWG × 4C: STW

SF-I56

NEMA L14-30P
30A, 250V



Wire Type:

10AWG × 4C: STW



UL & CSA POWER SUPPLY CORD SERIES

NEMA 5-15P
15A, 125V



18AWG×3C: SPT-2, SJT, SJTW
16AWG×3C: SPT-2, SJT, SJTW
14AWG×3C: SJT, SJTW

NEMA 5-15P
15A, 125V



18AWG×3C: SPT-1,SPT-2,SPT-3, SVT,SJT,SJTW,
SJO,SJTOW, ST,STW,STO,STOW,
SJE,SJEW,SJEO,SJEOW,SE,SEW,
SEO,SEOW

16AWG×3C: SPT-2,SVT,SJT,SJTW,SJO,SJTOW,
ST,STW,STO,STOW,SJE,SJEW,SJO,
SJEOW,SE,SEW,SEO,SEOW

14AWG×3C: SJT,SJTW,SJO,SJTOW,SJE,SJEW,
SJO,SJEW

NEMA 5-15P
15A, 125V



18AWG×3C: SPT-1,SPT-2,SPT-3, SVT,SJT,SJTW,
SJTO, SJTOW, ST,STW,STO,STOW,
SJE, SJEW,SJEO,SJEOW, SE,SEW,
SEO,SEOW
16AWG×3C: SPT-2,SVT,SJT,SJTW,SJTO,SJTOW,
ST,STW,STO,STOW, SJE, SJEW,SJEO,
SJEOW, SE,SEW,SEO,SEOW
14AWG×3C: SJT,SJTW,SJTO, SJTOW,SJE, SJEW,
SJEO, SJEOW

NEMA 5-20P
20A, 125V



18AWG X 3C: SJTOW SJT SJTW SPT-3
16AWG X 3C: SJTOW SJT SJTW SPT-3
12AWG X 3C: SJTOW SJT SJTW SPT-3

NEMA 5-15P
15A, 125V



18AWG×3C: SPT-3,SJT,SJTW,SJTO,SJTOW,SJTOO,
SJTOOW,STO,STOW,STOO,STOOW,
16AWG×3C: SPT-3,SJT,SJTW,SJTO,SJTOW,SJTOO,
SJTOOW,STO,STOW,STOO,STOOW,
SJEOW
14AWG×3C: SJT,SJTW,SJTO,SJTOW,SJTOO,SJTOOW,
ST,STW,STO,STOW,STOO,STOOW,SJEO,
SJEOW,SPT-3
12AWG×3C: SPT-3,SJT,SJTW,SJTO,SJTOW,SJTOO,
SJTOOW,ST,STW,STO,STOW,STOO,
STOOW,SJEO,SJEOW,SEO
10AWG×3C: SPT-3,SJT,SJTW,SJTO,SJTOW,SJTOO,
SJTOOW,ST,STW,STO,STOW,STOO,
STOOW,SJEOW,SEO



YFC-BONEAGLE

UL&CSA POWER SUPPLY CORD SERIES

SF-I62

NEMA 5-15R
15A, 125V



Wire Type:

18AWG×3C: SPT-3, SJT, SJTW, SJTO, SJTOW, SJTOO, SJTOOW, STO, STOW, STOO, STOOW,

16AWG×3C: SPT-3, SJT, SJTW, SJTO, SJTOW, SJTOO, SJTOOW, STO, STOW, STOO, STOOW, SJEOW

14AWG×3C: SJT, SJTW, SJTO, SJTOW, SJTOO, SJTOOW, ST, STW, STO, STOW, STOO, STOOW, SJEOW, SPT-3

12AWG×3C: SPT-3, SJT, SJTW, SJTO, SJTOW, SJTOO, SJTOOW, ST, STW, STO, STOW, STOO, STOOW, SJEOW, SEO

10AWG×3C: SPT-3, SJT, SJTW, SJTO, SJTOW, SJTOO, SJTOOW, ST, STW, STO, STOW, STOO, STOOW, SJEOW, SEO

SF-I63

NEMA 5-15R
15A, 125V



Wire Type:

16AWG×3C: SJT, SJTW, SJTOW, ST, STW, STOW, SJEOW

14AWG×3C: SJT, SJTW, SJTOW, ST, STW, STOW, SJEOW, SEOW

12AWG×3C: SJT, SJTW, SJTOW, ST, STW, STOW, SJEOW, SEOW

10AWG×3C: SJT, SJTW, SJTOW, ST, STW, STOW, SJEOW

SF-I64

NEMA 5-15P
15A, 125V
NEMA 5-15R
15A, 125V



SF-I65



Wire Type:

18AWG×2C: SPT-1



YFC-BONEAGLE

EUROPE POWER SUPPLY CORD SERIES

EUROPE POWER SUPPLY CORD SERIES

SF-01

2.5A, 250V



Wire Type:

H03VVH2-F 2×0.75mm²
H05VVH2-F 2×0.75mm²
H03VV-F 2×0.75mm²
H05VV-F 2×0.75mm²

SF-03

10/16A, 250V



Wire Type:

H03VV-F 3G0.75mm²
H05VV-F 3G0.75~1.0~1.5mm²
H05RR-F 3G0.75mm²

SF-04

10/16A, 250V



Wire Type:

H03VV-F 3G0.75mm²
H05VV-F 3G0.75~1.0~1.5mm²
H05RR-F 3G0.75mm²

SF-05

10/16A, 250V



Wire Type:

H03VV-F 2×0.75mm²
H03VVH2-F 2×0.75mm²
H05VV-F 2×0.75~1.0mm²
H05VVH2-F 2×0.75mm²

SF-06

13A, 250V



Wire Type:

H03VV-F 3G0.5~0.75mm²
H05VV-F 3G0.75~1.0~1.5mm²



YFC-BONEAGLE

EUROPE POWER SUPPLY CORD SERIES

SF-06(P)

13A, 250V



Wire Type:
H03VVH2-F 2×0.75mm²

SF-09

10A, 250V



Wire Type:
H03VV-F 3G0.75mm²
H05VV-F 3G0.75~1.0mm²

SF-09P

10A, 250V



Wire Type:
H05VV-F 3G0.75mm²
H05VV-F 3G1.0mm²

SF-10

10A, 250V



Wire Type:
H03VV-F 3G0.75mm²
H05VV-F 3G0.75~1.0mm²
H05RR-F 3G0.75~1.0mm²
H05RN-F 3G0.75~1.0mm²
H03RT-H 3G0.75mm²

SF-10R

10A, 250V



Wire Type:
H03VV-F 3G0.75mm²
H05VV-F 3G0.75~1.0~1.5mm²
H05RR-F 3G0.75~1.0~1.5mm²
H05RN-F 3G0.75~1.0~1.5mm²



YFC-BONEAGLE

EUROPE POWER SUPPLY CORD SERIES

EUROPE POWER SUPPLY CORD SERIES

SF-II

16A, 250V



Wire Type:
H05VV-F 3G 1.5mm²
H05RR-F 3G 1.5mm²

SF-I2

10A, 250V



Wire Type:
H03VVH2-F 2×0.75mm²
H05VVH2-F 2×0.75mm²
H03VV-F 2×0.75mm²
H05VV-F 2×0.75~1.0mm²
H05RR-F 2×0.75~1.0mm²
H05RN-F 2×0.75~1.0mm²

SF-81

IEC 320-C14
10A, 250V



Wire Type:
H05VV-F 3G 0.75~1.0mm²
H05RR-F 3G 0.75~1.0mm²

SF-82

IEC 320-C13
10A, 250V



Wire Type:
H05VV-F 3G 0.75~1.0~1.5mm²
227 IEC 53(RVV) 300/500V 3×0.75~1.0~1.5mm²

SF-83

IEC 320-C13
10A, 250V



Wire Type:
H05VV-F 3G 0.75~1.0~1.5mm²



YFC-BONEAGLE

EUROPE POWER SUPPLY CORD SERIES

SF-85A

IEC 320-C7
2.5A, 250V



Wire Type:
H03VVH2-F 2×0.75mm²
H05VVH2-F 2×0.75mm²

SF-87

IEC 320-C5
2.5A, 250V



Wire Type:
H03VV-F 3G0.75mm²
H05VV-F 3G0.75mm²

SF-300

IEC320-C19
16A125V



Wire Type:
H03VV-F 3G1.0mm²
H05VV-F 3G1.5mm²

EUROPE POWER SUPPLY CORD SERIES

AUSTRALIA POWER SUPPLY CORD SERIES

SF-131

10A, 250V



Wire Type:

H03VVH2-F 2×0.75mm²

H05VVH2-F 2×0.75mm²

H05VV-F 2×0.75~1.0~1.5mm²

SF-132

10A, 250V



Wire Type:

H05VV-F 3G0.75~1.0mm²

SF-132R

10A, 250V



Wire Type:

H05VV-F 3G1.0~1.5mm²

H05RR-F 3G1.0~1.5mm²

H05RN-F 3G1.0mm²

JAPAN POWER SUPPLY CORD SERIES

SF-22

7/12/15A, 125V



Wire Type:

VFF 2×0.75~1.25~2.0mm²
VCTF 2×0.75~1.25~2.0mm²
VCTFK 2×0.75~1.25~2.0mm²

SF-25

7/12/15A, 125V



Wire Type:

VFF 2×0.75~1.25~2.0mm²
VCTF 2×0.75~1.25~2.0mm²
VCTFK 2×0.75~1.25~2.0mm²

SF-26

7/12/15A, 125V



Wire Type:

VFF 2×0.75~1.25~2.0mm²
VCTF 2×0.75~1.25~2.0mm²
VCTFK 2×0.75~1.25~2.0mm²
VCTF 3×0.75~1.25~2.0mm²

SF-53

7/12/15A, 125V



Wire Type:

VFF 2×0.75~1.25~2.0mm²
VCTF 2×0.75~1.25~2.0mm²
VCTFK 2×0.75~1.25~2.0mm²

SF-82

7/12/15A, 125V



Wire Type:

VCTF 3×0.75~1.25~2.0mm²

JAPAN POWER SUPPLY CORD SERIES

SF-85A

3A, 125V



Wire Type:
VFF 2×0.75mm²
VCTFK 2×0.75mm²

CHINA POWER SUPPLY CORD SERIES

SF-2I

10A, 250V



Wire Type:

227 IEC 53(RVV) 300/500V 2×0.75~1.0mm²

SF-34

10A, 250V



Wire Type:

227 IEC 53(RVV) 300/500V 3×0.75~1.0mm²

SF-35

10A, 250V



Wire Type:

227 IEC 53(RVV) 300/500V 3×0.75~1.0mm²


SF-III

16A, 250V



Wire Type:

227 IEC 53(RVV) 300/500V 3×1.0~1.5mm²

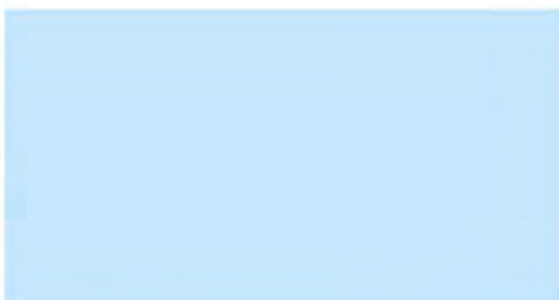



YFC-BONEAGLE

OTHERS

F068



Wire Type:
H05VV-F 3G 1.0mm²
H05VV-F 3G 0.75mm²


F082



Wire Type:
18AWG × 3C: SJT, SJTW
14AWG × 3C: SJT, SJTW
H05VV-F 3G 1.0mm²
H05VV-F 3G 0.75mm²

F120(Y-SR-OI)


18-20A, 125V



Wire Type:
14AWG × 3C: STW
12AWG × 3C: STW
10AWG × 3C: STW

F121(W-SR-OI)

18-20A, 125V



Wire Type:
14AWG × 3C: STW
12AWG × 3C: STW
10AWG × 3C: STW

OTHERS



CORDSET SERIES





YFC-BONEAGLE

CORD SET SERIES

SF-01+SF-85A



Wire Type:
H03VVH2-F 2×0.75mm²
H05VVH2-F 2×0.75mm²

SF-03+SF-82



Wire Type:
H05VV-F 3G0.75~1.0~1.5mm²

SF-03+SF-87



Wire Type:
H03VV-F 3G0.75mm²
H05VV-F 3G0.75mm²

SF-04+SF-82



Wire Type:
H05VV-F 3G0.75~1.0~1.5mm²

SF-04+SF-83



Wire Type:
H05VV-F 3G0.75~1.0~1.5mm²



YFC-BONEAGLE

CORD SET SERIES

SF-04+SF-87



Wire Type:
H03VV-F 3G0.75mm²
H05VV-F 3G0.75mm²

SF-06+SF-82



Wire Type:
H05VV-F 3G0.75~1.0~1.5mm²

SF-06+SF-85A



Wire Type:
H03VVH2-F 2×0.75mm²

SF-06+SF-87



Wire Type:
H03VV-F 3G0.75mm²
H05VV-F 3G0.75mm²

SF-09+SF-82



Wire Type:
H05VV-F 3G0.75~1.0mm²

CORD SET SERIES

SF-09+SF-87



Wire Type:
H03VV-F 3G0.75mm²
H05VV-F 3G0.75mm²

SF-10+SF-82



Wire Type:
H05VV-F 3G0.75~1.0mm²

SF-21P+SF-51



Wire Type:
16AWG × 2C: SPT-2

SF-21+SF-85A



Wire Type:
18AWG × 2C: SPT-1, SPT-2, HPN

SF-21P+SF-85B




Wire Type:
18AWG × 2C: SPT-1, SPT-2, HPN, NISPT-1, NISPT-2



YFC-BONEAGLE

CORD SET SERIES

SF-23P+SF-53




Wire Type:
18AWG × 2C: SVT, SJT, SJTW
16AWG × 2C: SJT, SJTW
14AWG × 2C: SJTW

SF-3I+SF-52



Wire Type:
18AWG × 3C: SJT, SJTW, SVT
16AWG × 3C: SJT, SJTW, SPT-2, SVT
14AWG × 3C: SJT, SJTW

SF-3I+SF-523S



Wire Type:
16AWG × 3C: SJT, SJTW, SPT-2
14AWG × 3C: SJT, SJTW

SF-3I+SF-82



Wire Type:
18AWG × 3C: SJT, SJTSHD, SVT, SVTSHD
16AWG × 3C: SJT, SJTSHD
14AWG × 3C: SJT, SJTW

SF-3I+SF-87



Wire Type:
18AWG × 3C: SPT-2, SJT, SVT



YFC-BONEAGLE

CORD SET SERIES

SF-31L+SF-52N



Wire Type:

16AWG × 3C: STO, STOW, STOO, STOOW, SJTO, SJTOW, SJTOO, SJTOOW
 14AWG × 3C: ST, STW, STO, STOW, STOO, STOOW, SJTO, SJTOW, SJTOO, SJTOOW
 12AWG × 3C: ST, STW, STO, STOW, STOO, STOOW, SJTO, SJTOW, SJTOO, SJTOOW
 10AWG × 3C: SJT, SJTW, ST, STW, STO, STOW, STOO, STOOW, SJTO, SJTOW, SJTOO, SJTOOW

SF-31L+SF-523G



Wire Type:

16AWG × 3C: SJTW
 14AWG × 3C: SJTW, STW
 12AWG × 3C: SJTW, STW
 10AWG × 3C: SJTW, ST


SF-31M+SF-52M



Wire Type:

16AWG × 3C: SJTW, SJTOW, SJEOW, SEOW
 14AWG × 3C: SJTW, SJTOW, SJEOW, SEOW, STW
 12AWG × 3C: SJTW, SJTOW, SJEOW, SEOW, STW
 10AWG × 3C: SJTW, SJEOW, STW

SF-31M+SF-56M



Wire Type:

16AWG × 3C: SJTW, SJTOW, SJEOW, SEOW
 14AWG × 3C: SJTW, SJTOW, SJEOW, SEOW, STW
 12AWG × 3C: SJTW, SJTOW, SJEOW, SEOW, STW
 10AWG × 3C: SJTW, SJEOW, STW

SF-31N+SF-52



Wire Type:

16AWG × 3C: SPT-2
 14AWG × 3C: SPT-3
 12AWG × 3C: SJT, SJTW



YFC-BONEAGLE


CORD SET SERIES

SF-31N+SF-56



Wire Type:
16AWG × 3C: ST,STW
14AWG × 3C: ST,STW
12AWG × 3C: SJT,SJTW,ST,STW
10AWG × 3C: SJT,SJTW

SF-32+SF-52



Wire Type:
18AWG × 3C: SJT,SJTW,SVT
16AWG × 3C: SJT,SJTW
14AWG × 3C: SJT,SJTW,SPT-3

SF-32D+SF-83




Wire Type:
18AWG × 3C: SJT,SVT
16AWG × 3C: SJT
14AWG × 3C: SJT

SF-35+SF-82



Wire Type:
227 IEC 53(RVV) 300/500V 3×0.75~1.0mm²

SF-58+SF-59



Wire Type:
10AWG × 3C: STW



YFC-BONEAGLE

CORD SET SERIES

SF-68+SF-69



Wire Type:
6AWG×3C: STW

SF-70+SF-71



Wire Type:
Parallel Wire 2.1×4.3mm

SF-72+SF-72R



Wire Type:
6AWG×3C+8AWG×1C: STW

SF-76+SF-77



Wire Type:
16AWG×3C: SJT,SJTW,ST,STW,STO,STOO,
SJTO,SJTOO
14AWG×3C: SJT,SJTW,ST,STW,STO,STOO,
SJTO,SJTOO
12AWG×3C: SJT,SJTW,ST,STW,STO,STOO,SJTO,
SJTOO,STOW,STOOW,SJTOOW,
SJE0,SJEOW,SEOW
10AWG×3C: SJT,SJTW,ST,STW,STO,STOO,SJTO,
SJTOO,STOW,STOOW,SJTOOW,
SJE0,SJEOW,SJTOW

SF-31L+SF-134



Wire Type:
16AWG×3C: STO,STOO,SJTO,SJTOO,STOW,
STOOW,SJTOW,SJTOOW
14AWG×3C: STO,STOO,SJTO,SJTOO,STOW,
STOOW,SJTOW,SJTOOW
12AWG×3C: STO,STOO,SJTO,SJTOO,STOW,
STOOW,SJTOW,SJTOOW
10AWG×3C: STO,STOO,SJTO,SJTOO,STOW,
STOOW,SJTOW,SJTOOW

CORD SET SERIES



YFC-BONEAGLE

CORD SET SERIES

SF-155+SF-156



Wire Type:
10AWG×4C: STW

SF-161+SF-162



Wire Type:
16AWG×3C: STO,STOO,SJTO,SJTOO, STOW,
STOOW,SJTOW,SJTOOW
14AWG×3C: STO,STOO,SJTO,SJTOO, STOW,
STOOW,SJTOW,SJTOOW
12AWG×3C: STO,STOO,SJTO,SJTOO, STOW,
STOOW,SJTOW,SJTOOW
10AWG×3C: STO,STOO,SJTO,SJTOO, STOW,
STOOW,SJTOW,SJTOOW



SF-161+SF-163



Wire Type:
16AWG×3C: STO,STOO,SJTO,SJTOO, STOW,
STOOW,SJTOW,SJTOOW
14AWG×3C: STO,STOO,SJTO,SJTOO, STOW,
STOOW,SJTOW,SJTOOW
12AWG×3C: STO,STOO,SJTO,SJTOO, STOW,
STOOW,SJTOW,SJTOOW
10AWG×3C: STO,STOO,SJTO,SJTOO, STOW,
STOOW,SJTOW,SJTOOW



SF-81+SF-82



Wire Type:
H05VV-F 3G0.75~1.0mm²
18AWG×3C: SJT,SJTSHD,SVT,SVTSHD
16AWG×3C: SJT,SJTSHD
14AWG×3C: SJT,SJT



SF-131+SF-85A



Wire Type:
H03VVH2-F 2×0.75mm²
H05VVH2-F 2×0.75mm²



CORD SET SERIES



YFC-BONEAGLE

CORD SET SERIES

SF-132+SF-82



Wire Type:
H05VV-F 3G0.75~1.0mm²

SF-04+F068+SF-82




Wire Type:
H05VV-F 3G1.0mm²
H05VV-F 3G0.75mm²

SF-76+FI20+SF-77



Wire Type:
14AWG×3C: STW
12AWG×3C: STW
10AWG×3C: STW

SF-31L+FI21+SF-52N



Wire Type:
14AWG×3C: STW
12AWG×3C: STW
10AWG×3C: STW

CORD SET SERIES




YFC-BONEAGLE

LIGHTING STRING AND POWER OUTLET STRING SERIES

SF-3IL+LS+SF-52N

15A, 125V



Wire Type:
12AWG×3C: SJTW,STW

SF-76+LS+SF-77

20A, 125V



Wire Type:
12AWG×3C: SJTW,STW

SF-3IL+OS+SF-52N

15A, 125V




Wire Type:
12AWG×3C: STW

LIGHTING STRING AND POWER OUTLET STRING SERIES

PORTABLE HAND LAMP SERIES

LP TYPE

15A, 125V




Wire Type:

18AWG × 2C: SJTW
18AWG × 3C: SJTW
16AWG × 3C: SJTW
14AWG × 3C: SJTW
12AWG × 3C: SJTW

LM TYPE

15A, 125V






Wire Type:

18AWG × 3C: SJTW
16AWG × 3C: SJTW
14AWG × 3C: SJTW
12AWG × 3C: SJTW



Innovation • Servings • Participate


WIRE SERIES



Email: yfcdg@yfc-china.com

<http://www.yfc-china.com>

Construction

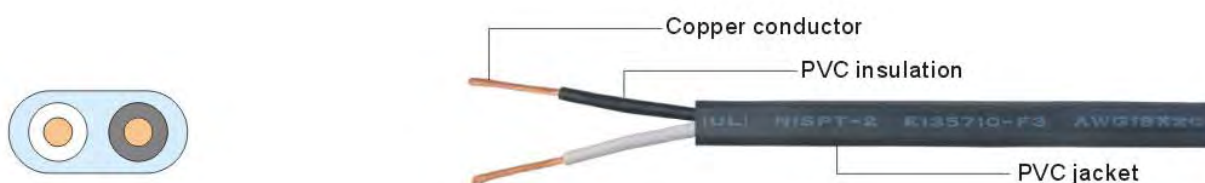

Product Description

- Bare stranded copper conductor
- Color-coded PVC insulation and jacket
- Rated temperature: 60°C~105°C
- Rated voltage: 300V
- Passed UL VW-1 & CSA FT2 flame test

Applications

- NISPT-1 & NISPT-2: For use in household clocks, speaker, radios and similar appliances
- NISPT-2 is for heavier construction than NISPT-1

Wire Type	No. of core	Conductor		Insulation Thickness mm	Jacket Thickness mm	Overall Diameter mm
		AWG	No./mm			
NISPT-1	2	18	41/0.160	0.38	0.38	3.0X5.4
NISPT-2	2	18	41/0.160	0.76	0.38	3.7X7.1





YFC-BONEAGLE

UL&CSA SPT(integral)

FILE NO: E135710 LL95737

UL/CSA APPROVAL

Construction

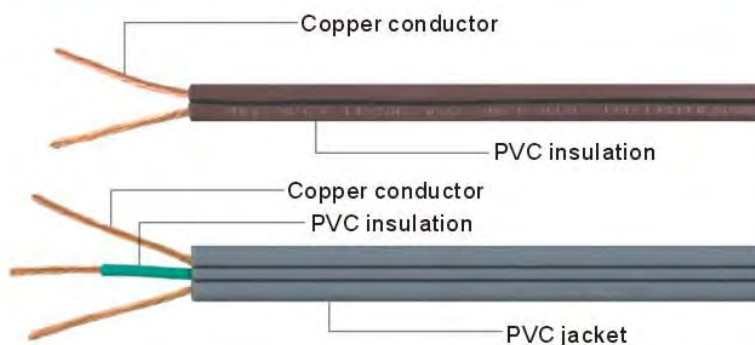

Product Description

- Bare stranded copper conductor
- Color-coded PVC insulation
- Rated temperature: 60°C~105°C
- Rated voltage: 300V
- Passed UL VW-1 & CSA FT2 flame test
- Outdoor-use cord type SPT-1W SPT-2W

Applications

- SPT-1 & SPT-2: For use in household clocks, fans, radios and similar appliances
- SPT-2 is for heavier construction than SPT-1
- SPT-3: For heavy-duty use in damp locations: especially suitable for refrigerators and room-size air conditioners

Wire Type	No. Of core	Conductor		Insulation Thickness mm	Overall Diameter mm
		AWG	No./mm		
SPT-1(W)	2	18	41/0.160	0.76	2.75×5.3
	3	18	41/0.160	0.76	2.9×7.9
SPT-2(W)	2	18	41/0.160	1.14	3.5×6.8
	3	18	41/0.160	1.14	3.7×8.7
	2	16	26/0.252	1.14	3.7×7.4
	3	16	26/0.252	1.14	3.9×9.1
SPT-3	2	18	41/0.160	1.52	4.25×8.25
	3	18	41/0.160	1.52	4.25×9.8
	2	16	26/0.252	1.52	4.5×8.8
	3	16	26/0.252	1.52	4.5×11.6
	2	14	41/0.252	2.03	5.9×10.6
	3	14	41/0.252	2.03	5.9×12.8
	2	12	65/0.252	2.41	7.2×12.6
	3	12	65/0.252	2.41	7.2×15.3
	2	10	104/0.252	2.79	8.4×14.8
	3	10	104/0.252	2.79	8.4×17.8




YFC-BONEAGLE

UL&CSA SVT

FILE NO: E135710 LL95737

UL/CSA APPROVAL

Construction



UL&CSA SVT

Product Description

- Bare stranded copper conductor
- Color-coded PVC insulation
- Cores twisted together with fillers
- Separator overcore
- PVC jacketed water-resistant type
- Rated temperature: 60°C~105°C, Rated voltage: 300V
- Passed UL VW-1 & CSA FT2 flame test

Applications

- For hight-duty portable tools, mixers and vacuum cleaners

Wire Type	No. Of core	Conductor		Insulation Thickness mm	Jacket Thickness mm	Overall Diameter mm
		AWG	No./mm			
SVT	2	18	41/0.160	0.38	0.76	6.0±0.1
	3	18	41/0.160	0.38	0.76	6.3±0.1
	2	17	52/0.160	0.38	0.76	6.3±0.1
	3	17	52/0.160	0.38	0.76	6.6±0.1
	2	16	26/0.252	0.38	0.76	6.4±0.1
	3	16	26/0.252	0.38	0.76	6.7±0.1




YFC-BONEAGLE

UL&CSA SJT

FILE NO: E135710 LL95737

UL/CSA APPROVAL

Construction

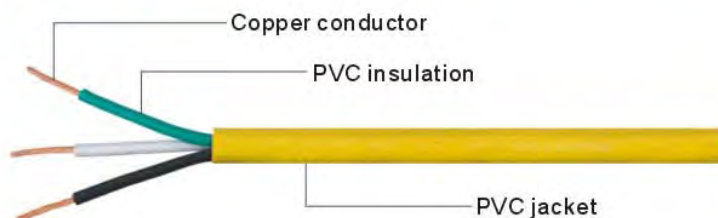

Product Description

- Bare stranded copper conductor
- Color-coded PVC insulation
- Cores twisted together
- PVC jacketed water-resistant type
- Rated temperature: 60°C~105°C, Rated voltage: 300V
- Passed UL VW-1 & CSA FT2 flame test
- Oil-resistant type SJTO, SJTOO and Outdoor-use cord type SJTW are also available
- Outdoor-use cords pass -40°C cold bend test

Applications

- For portable hand tools, washing machines, polishers, sanders, vibrators, shop lights, therapeutic machines, dish washers, medical equipment, office machines and outdoor-use cord sets

Wire Type	No. Of core	Conductor		Insulation Thickness mm	Jacket Thickness mm	Overall Diameter mm
		AWG	No./mm			
SJT SJTO SJTOO SJTW SJTOW SJTOOW	2	18	41/0.160	0.76	0.76	7.4±0.1
	3	18	41/0.160	0.76	0.76	7.8±0.1
	4	18	41/0.160	0.76	0.76	8.36±0.1
	2	16	26/0.252	0.76	0.76	8.0±0.1
	3	16	26/0.252	0.76	0.76	8.5±0.1
	4	16	26/0.252	0.76	0.76	9.2±0.1
	2	14	41/0.252	0.76	0.76	8.9±0.1
	3	14	41/0.252	0.76	0.76	9.25±0.1
	4	14	41/0.252	0.76	0.76	10.2±0.15
	2	12	65/0.252	0.76	1.14	10.5±0.15
	3	12	65/0.252	0.76	1.14	11.0±0.15
	4	12	65/0.252	0.76	1.14	12.1±0.15
	3	10	104/0.252	1.14	1.52	14.6±0.15




YFC-BONEAGLE

UL&CSA SJE

FILE NO: LL95737

CSA-CUS APPROVAL

Construction

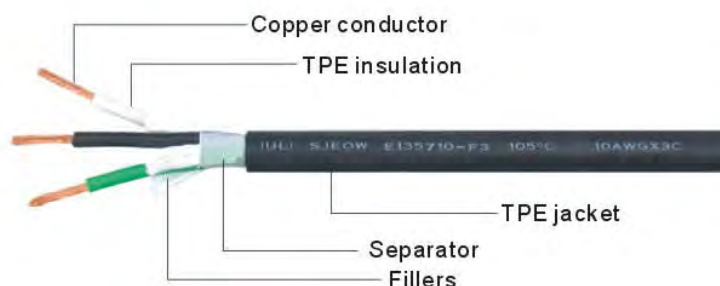

Product Description

- Bare stranded copper conductor
- Color-coded TPE insulation
- Cores twisted together with fillers
- Separator overcore
- TPE jacketed water-resistant type
- Rated temperature: 60°C~105°C, Rated voltage: 300V
- Passed UL VW-1 & CSA FT2 flame test
- Oil-resistant type SJEO, SJEOO and Outdoor-use cord type SJEW are also available
- Outdoor-use cords pass -40°C cold bend test

Applications

- For portable hand tools, washing machines, polishers, sanders, vibrators, shop lights, therapeutic machines, dish washers, medical equipment, office machines and outdoor-use cord sets

Wire Type	No. Of core	Conductor		Insulation Thickness mm	Jacket Thickness mm	Overall Diameter mm
		AWG	No./mm			
SJE	3	18	41/0.160	0.76	0.76	7.8±0.1
SJEO	3	16	26/0.252	0.76	0.76	8.5±0.1
SJEOO	3	14	41/0.252	0.76	0.76	9.25±0.1
SJEW	3	12	65/0.252	0.76	1.14	11.0±0.15
SJEOW	3	10	104/0.252	1.14	1.52	14.6±0.15
SJEOOW	3					




YFC-BONEAGLE

UL Power-Limited Circuit Cable Type CL2

FILE NO: E241235

UL APPROVAL

Construction

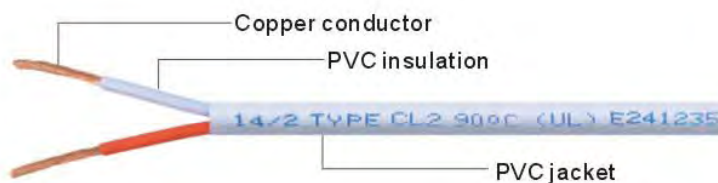

Product Description

- Bare stranded copper conductor
- Solid PVC insulation
- PVC jacketed
- Rated temperature: 60,75,90 or 105°C

Applications

- For A/V, door bell & other signal appliance

Wire Type	No. Of core	Conductor		Insulation Thickness mm	Jacket Thickness mm	Overall Diameter mm
		AWG	No./mm			
CL2	2	18	16/0.252	0.23	0.58	4.7±0.1
	4	18	16/0.252	0.23	0.58	5.4±0.1
	2	16	26/0.252	0.23	0.58	5.3±0.1
	4	16	26/0.252	0.23	0.58	6.1±0.1
	2	14	41/0.252	0.23	0.58	6.1±0.1
	4	14	41/0.252	0.23	0.58	7.1±0.1
	2	12	65/0.252	0.23	0.58	7.0±0.1
	4	12	65/0.252	0.23	0.58	8.2±0.1




YFC-BONEAGLE

UL&CSA ST

FILE NO: E135710 LL95737

UL/CSA APPROVAL

Construction

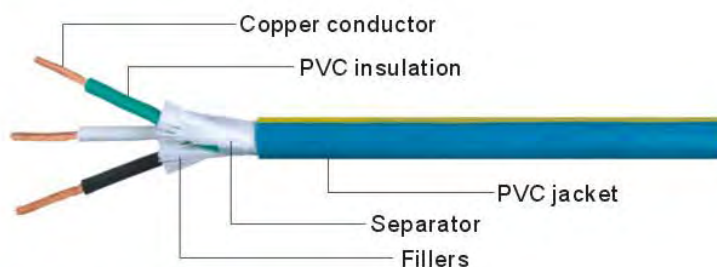

Product Description

- Bare stranded copper conductor
- Color-coded PVC insulation
- Cores twisted together with fillers
- Separator overcore
- PVC jacketed water-resistant type
- Rated temperature: 60°C~105°C, Rated voltage: 600V
- Passed UL VW-1 & CSA FT2 flame test
- Oil-resistant type STO,STOO and Outdoor-use cord type STW are also available
- Outdoor-use cords pass -40°C cold bend test

Applications

- For large dynamoelectric appliance, recreational vehicle & mobile homes

Wire Type	No. Of core	Conductor		Insulation Thickness mm	Jacket Thickness mm	Overall Diameter mm
		AWG	No./mm			
ST STO STOO STW STOW STOOW	2	18	41/0.160	0.76	1.52	8.8±0.1
	3	18	41/0.160	0.76	1.52	9.3±0.1
	2	16	26/0.252	0.76	1.52	9.4±0.1
	3	16	26/0.252	0.76	1.52	9.9±0.1
	3	14	41/0.252	1.14	2.03	13.4±0.15
	3	12	65/0.252	1.14	2.41	15.2±0.2
	3	10	104/0.252	1.14	2.41	16.71±0.2
	4	10	104/0.252	1.14	2.41	18.0±0.2
	3	8	65/0.401	1.52	2.79	21.7±0.2
	4	8	65/0.401	1.52	3.18	25.4±0.2
	3	6	133/0.354	1.52	3.18	24.9±0.2
	3+1	6/3C	133/0.354	1.52	3.18	27.3±0.3
		8/1C	65/0.401			




YFC-BONEAGLE

UL&CSA SE

FILE NO: LL95737

CSA-CUS APPROVAL

Construction

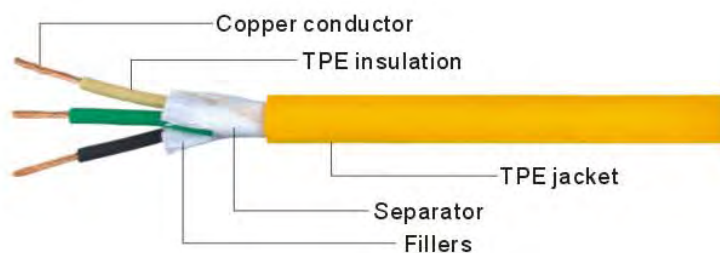

UL&CSA SE

Product Description

- Bare stranded copper conductor
- Color-coded TPE insulation
- Cores twisted together with fillers
- Separator overcore
- TPE jacketed water-resistant type
- Rated temperature: 60°C~105°C, Rated voltage: 600V
- Passed UL VW-1 & CSA FT2 flame test
- Oil-resistant type SEO, SEOO and Outdoor-use cord type SEW are also available
- Outdoor-use cords pass -40°C cold bend test

Applications

- For large dynamoelectric appliance, recreational vehicle & mobile homes

Wire Type	No. Of core	Conductor		Insulation Thickness mm	Jacket Thickness mm	Overall Diameter mm
		AWG	No./mm			
SE SEO SEOO SEW SEOW SEOWW	3	18	41/0.160	0.76	1.52	9.3±0.1
	3	16	26/0.252	0.76	1.52	9.9±0.1
	3	14	41/0.252	1.14	2.03	13.4±0.15
	3	12	65/0.252	1.14	2.41	15.2±0.2
	3	10	104/0.252	1.14	2.41	16.71±0.2




YFC-BONEAGLE

UL&CSA SRDT

FILE NO: E135710

UL/CUL APPROVAL

Construction

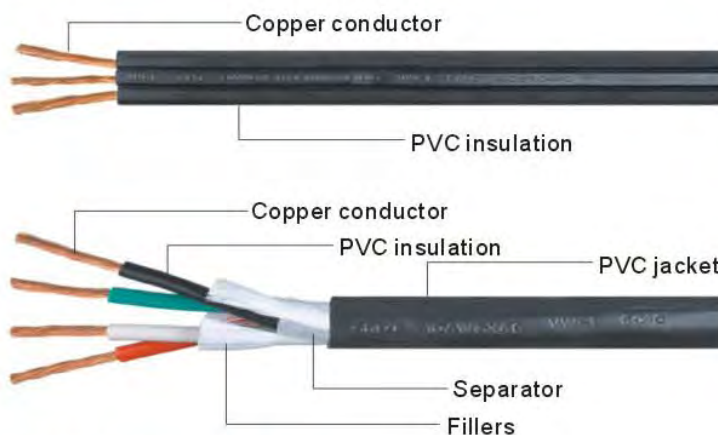

Product Description

Parallel cord

- Bare stranded copper conductor
- Color-coded PVC insulation
- Rated temperature: 60°C, 90°C
- Passed UL VW-1 & CSA FT2 flame test

Round cord


- Bare stranded copper conductor
- Color-coded PVC insulation
- Cores twisted together with fillers
- Separator overcore
- PVC jacketed water-resistant type
- Rated temperature: 60°C, 90°C
- Passed UL VW-1 & CSA FT2 flame test

Applications

- Range and Dryer application

Wire Type	No. Of core	Conductor		Insulation Thickness mm	Jacket Thickness mm	Overall Diameter mm
		AWG	No./mm			
SRDT	3	10	26/0.506	2.54	/	8.3×20.6
	2+1	8/2C	41/0.506	2.54	/	9.0×21.8
		10/1C	26/0.506			
	2+1	6/2C	65/0.506	2.54	/	10.0×24.4
		8/1C	41/0.506			
	4	10	26/0.506	1.14	1.52	16.3±0.2
	2+2	8/2C	41/0.506	1.14	1.52	17.6±0.2
		10/2C	26/0.506			
	2+2	6/2C	65/0.506	1.14	1.52	19.5±0.2
		8/2C	41/0.506			

Construction

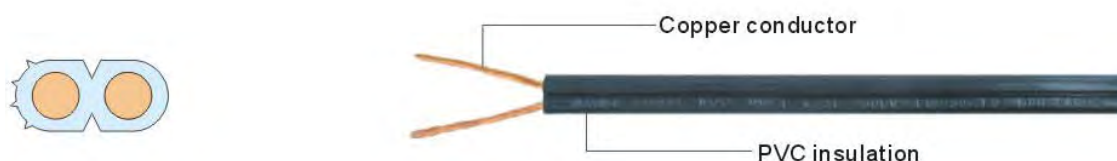

Product Description

- Tinned or bare stranded copper conductor
- Color-coded PVC insulation
- Rated temperature: 60,75,80,90 or 105°C
- Rated voltage: 300V
- Passed UL VW-1 & CSA FT2 flame test

Applications

- AWM 20288: For use in chain link of chain suspended lighting fixtures

Wire Type	No. Of core	Conductor		Insulation Thickness mm	Overall Diameter mm
		AWG	No./mm		
AWM 20288	2	18	41/0.160	1.02	3.25×5.8





YFC-BONEAGLE

UL AWM 2725

FILE NO: E139315

UL APPROVAL

Construction

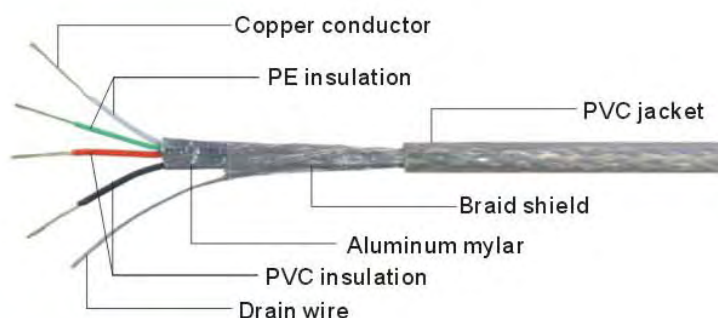

Product Description

- Stranded tinned copper conductor
- Color-coded PE and PVC insulation
- Two PE insulated cores twisted as single pair
- Core cable under aluminum mylar shield
- Tinned stranded copper drain wire
- Tinned copper wire braid shield
- PVC jacket
- Rated temperature: 60°C or 80°C, Rated voltage: 30V

Applications

- Used for mouse, TV game, instrumentation and computer cable

Wire Type	No. Of core	Conductor		Insulation Thickness mm	Jacket Thickness mm	Overall Diameter mm
		AWG	No./mm			
AWM 2725 28+28	2+2	28	7/0.121	0.20	0.40	3.8±0.2
		28	7/0.121	0.26		
AWM 2725 28+26	2+2	28	7/0.121	0.20	0.45	4.0±0.2
		26	7/0.153	0.26		
AWM 2725 28+24	2+2	28	7/0.121	0.20	0.46	4.5±0.2
		24	7/0.192	0.26		
AWM 2725 28+20	2+2	28	7/0.121	0.20	0.64	5.0±0.2
		20	7/0.310	0.26		





YFC-BONEAGLE

UL Underground Low Energy Circuit Cable

FILE NO: E239881

UL APPROVAL

Construction

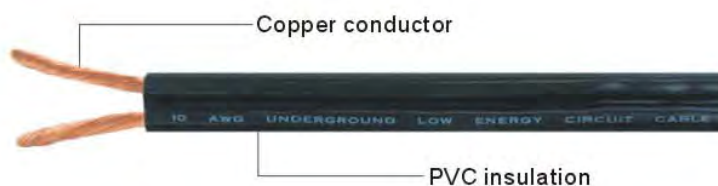

Product Description


- Bare stranded copper conductor
- Color-coded PVC insulation
- Rated temperature: 60°C
- Rated voltage: 150V
- Sunlight Resistant

Applications

- Out-door use for moist condition, for example gardens & golf course irrigation system

Wire Type	No. Of core	Conductor		Insulation Thickness mm	Overall Diameter mm
		AWG	No./mm		
Underground Low Energy Circuit Cable	2	18	16/0.252	1.14	3.35×7.1
	2	16	26/0.252	1.14	3.9×8.2
	2	14	41/0.252	1.14	4.5×9.4
	2	12	65/0.252	1.14	4.7×10.3
	2	10	104/0.252	1.14	5.25×11.2
	2	8	131/0.283	1.52	7.4×15.4

Construction

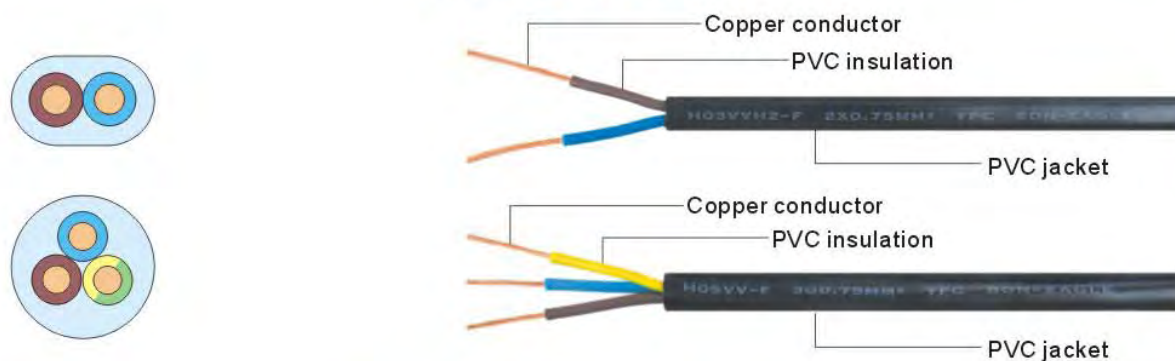

Product Description

H03VVH2-F & H03VV-F

- Bare stranded copper conductor
- Color-coded PVC insulation and jacket
- Rated temperature: 70°C
- Rated voltage: 300V/300V

H05VVH2-F & H05VV-F

- Bare stranded copper conductor
- Color-coded PVC insulation and jacket
- Rated temperature: 70°C
- Rated voltage: 300V/500V


Applications

- Suitable for indoor small electrical instruments power supply wire

Wire Type	No. Of core	Conductor		Insulation Thickness mm	Jacket Thickness mm	Overall Diameter mm
		Area	No./mm			
H03VVH2-F	2	0.5	16/0.20	0.5	0.6	3.3×5.4
	2	0.75	24/0.20	0.5	0.6	3.4×5.6
H03VV-F	2	0.75	24/0.20	0.5	0.6	5.6±0.1
	3	0.5	16/0.20	0.5	0.6	5.8±0.1
	3	0.75	24/0.20	0.5	0.6	6.0±0.1
H05VVH2-F	2	0.75	24/0.20	0.6	0.8	4.0×6.4
H05VV-F	2	0.75	24/0.20	0.6	0.8	6.4±0.1
	2	1.0	32/0.20	0.6	0.8	6.6±0.1
	2	1.5	30/0.254	0.7	0.8	7.7±0.1
	2	2.5	50/0.254	0.92	1.1	10.0±0.15
	3	0.75	24/0.20	0.6	0.8	6.8±0.1
	3	1.0	32/0.20	0.6	0.8	7.0±0.1
	3	1.5	30/0.254	0.7	0.9	8.3±0.1

CENELEC European Committee for Electrotechnical Standardization

VDE & 9-European APPROVAL Construction



Product Description

- Tinned or bare stranded copper conductor
- Color-coded PVC insulation
- Rated temperature: 70°C
- Rated voltage: 300V/500V

Applications

- Suitable for indoor small electrical instruments

Wire Type	No. Of core	Conductor		Insulation Thickness mm	Overall Diameter mm
		Area	No./mm		
H05V-K	1	0.5	16/0.20	0.6	2.2±0.1
	1	0.75	24/0.20	0.6	2.4±0.1

CENELEC European Committee for Electrotechnical Standardization

Construction



Product Description

- Bare stranded copper conductor
- Color-coded PVC insulation and jacket
- Cores twisted together
- Rated temperature: 70°C
- Rated voltage: 300V/500V

Applications

- Suitable for indoor small electrical instruments power supply wire

Wire Type	No. Of core	Conductor		Insulation Thickness mm	Jacket Thickness mm	Overall Diameter mm
		Area	No./mm			
227 IEC 53(RVV)	3	0.75	24/0.20	0.6	0.8	6.8±0.1
	3	1.0	32/0.20	0.6	0.8	7.0±0.1
	3	1.5	30/0.254	0.7	0.9	8.3±0.1





YFC-BONEAGLE

PSE Approved Cord & Cable

FILE NO: E139315

PSE APPROVAL

Construction

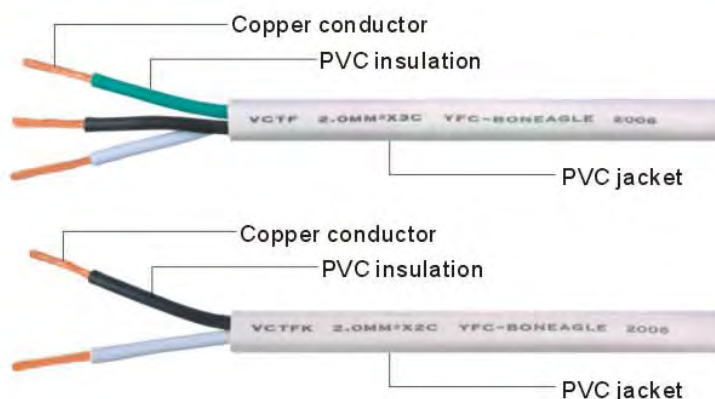

Product Description

TYPE VCTF

- Bare stranded copper conductor
- Color-coded PVC insulation
- Cores twisted together
- PVC jacketed round cord
- Rated temperature: 60°C, Rated voltage: 300V

TYPE VCTFK

- Bare stranded copper conductor
- Color-coded PVC insulation
- PVC jacketed oval cord
- Rated temperature: 60°C, Rated voltage: 300V

Applications

- Suitable for indoor small electrical instruments

Wire Type	No. Of core	Conductor		Insulation Thickness mm	Jacket Thickness mm	Overall Diameter mm
		Area	No./mm			
VCTF	2	0.75	30/0.18	0.6	1.0	6.6±0.1
	2	1.25	50/0.18	0.6	1.0	7.4±0.1
	2	2.0	37/0.263	0.6	1.0	8.0±0.1
	3	0.75	30/0.18	0.6	1.0	7.0±0.1
	3	1.25	50/0.18	0.6	1.0	7.8±0.1
	3	2.0	37/0.263	0.6	1.0	8.5±0.1
VCTFK	2	0.75	30/0.18	0.6	1.0	4.3×6.6
	2	1.25	50/0.18	0.6	1.0	4.7×7.4
	2	2.0	37/0.263	0.6	1.0	5.0×8.0




YFC-BONEAGLE

PSE Approved Cord & Cable

FILE NO: E139315

PSE APPROVAL

Construction



Product Description

- Bare stranded copper conductor
- PVC insulated flat twin cord
- Rated temperature: 60°C, Rated voltage: 300V

Applications

- Suitable for indoor small electrical instruments

Wire Type	No. Of core	Conductor		Insulation Thickness mm	Overall Diameter mm
		Area	No./mm		
VFF	2	0.75	30/0.18	0.8	2.7×5.4
	2	1.25	50/0.18	0.8	3.1×6.2
	2	2.0	37/0.263	0.8	3.4×6.8

Domestic & International Plug Configurations:

PLUG CONFIGURATION	TYPE OF PLUG	PLUG CONFIGURATION	TYPE OF PLUG	PLUG CONFIGURATION	TYPE OF PLUG	PLUG CONFIGURATION	TYPE OF PLUG
	SOUTH AMERICA NBR14136 BRAZIL PLUG		EUROPE CEE7-VII BELGIUM/FRANCE		OLD BRITISH STANDARD BS 546		MIDDLE EAST ISRAEL SII-005 SII PLUG
	SOUTH AMERICA NBR14136 BRAZIL PLUG		EUROPE DENMARK		BRITISH STANDARD BS 1363		SOUTH AFRICA SABS 164-1, 1997 SABS PLUG
	EUROPE CEE7 "EURO PLUG"		EUROPE SWITZERLAND		AUSTRALIA (UNGROUNDING)		
	EUROPE CEE7 "SCHUKO"		EUROPE ITALY		AUSTRALIA ETSAS/86		

IEC 320 Configurations:

CONNECTORS	CURRENT RATING	TEMP. RATING	EQUIP. CLASS	CONNECTORS	CURRENT RATING	TEMP. RATING	EQUIP. CLASS	CONNECTORS	CURRENT RATING	TEMP. RATING	EQUIP. CLASS
	2.5	65°C	II		6	65°C	II		10/15	65°C	II
	2.5	65°C	0		10	65°C	0		16/20	65°C	I
	2.5	65°C	I		10/15	65°C	I		16/20	65°C	I
	2.5	65°C	II		10/15	65°C	I		16/20	65°C	II

NEMA Configurations:


VOLTAGE RATING	15AMP		20AMP		30AMP		50AMP	
	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG
125V 2 POLE 2 WIRE								
250V 2 POLE 2 WIRE								
125V 2 POLE 3 WIRE GROUND								
250V 2 POLE 3 WIRE GROUND								
277V 2 POLE 3 WIRE GROUND								




YFC-BONEAGLE

TECHNICAL INFORMATION

Harmonized Wire Coding System

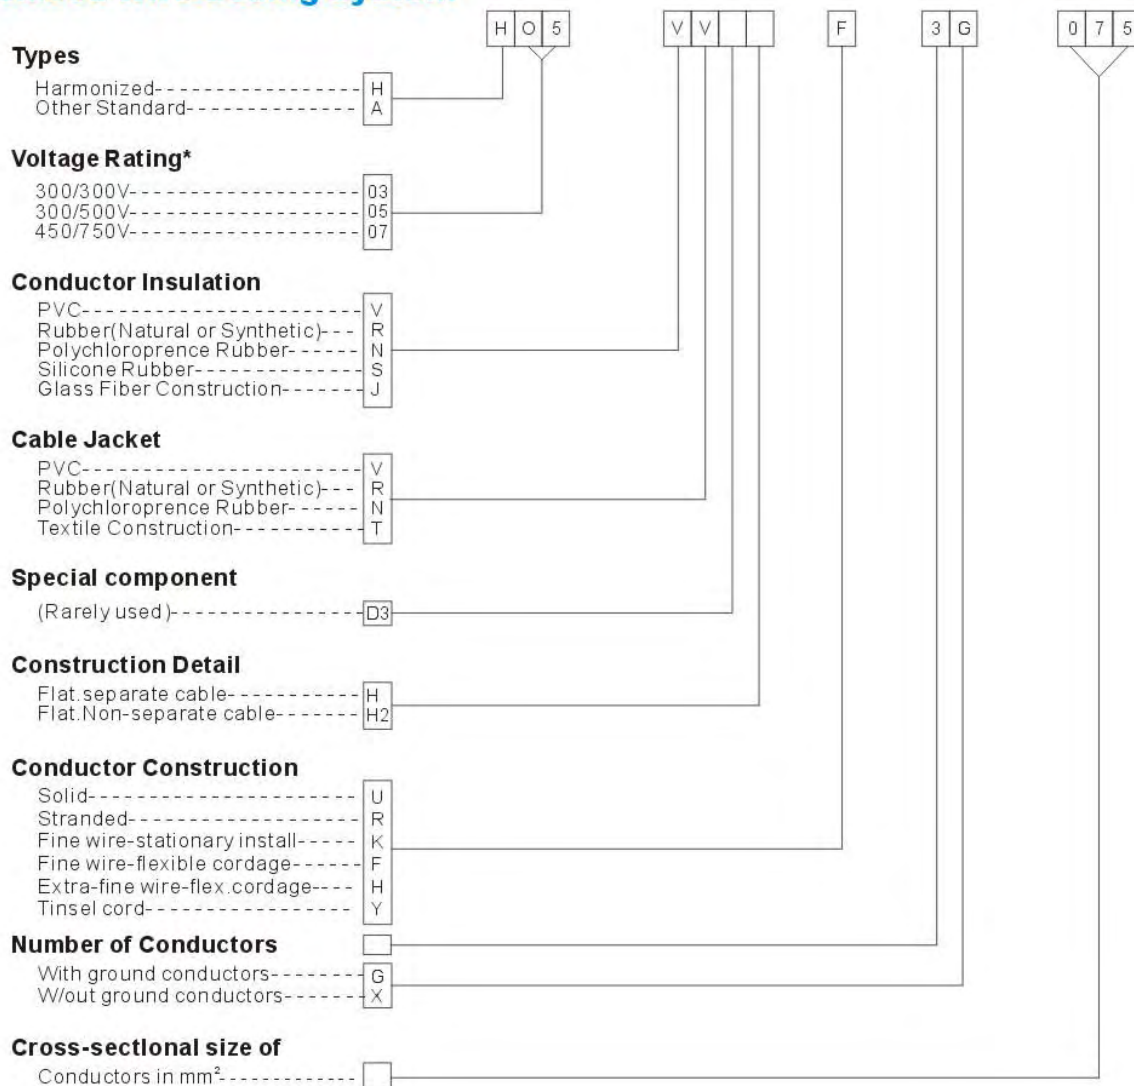

Japanese Cordage Types

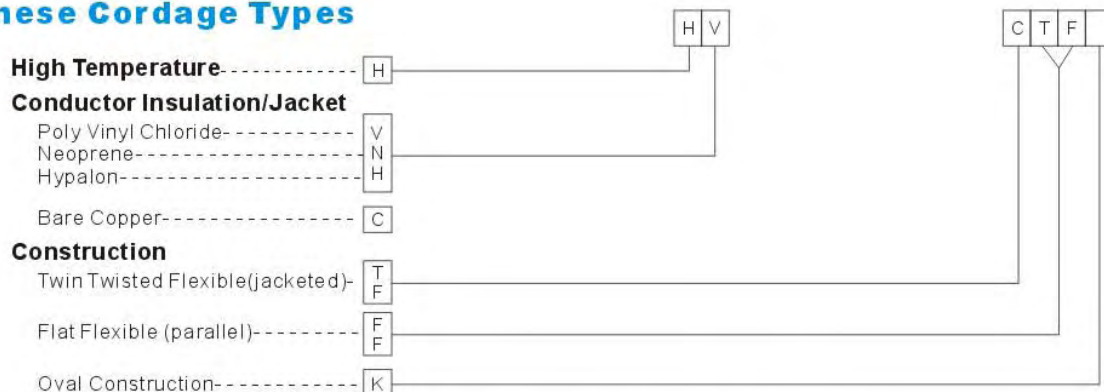

Email: yfcdg@yfc-china.com

<http://www.yfc-china.com>



YFC-BONEAGLE

TECHNICAL INFORMATION

U.L. Cord Type construction and Rating

Cord Type**	AWG Size Range	NO of Condrs.	Conductor Insulation	Jacket	Temp. Rating***		Voltage Rating
					Std.	Other	
TP	27(Tinsel)	2	.030 Rubber		60		250
TPT	27(Tinsel)	2	.030 Plastic		60		250
SP-1	18	2+	.030 Rubber		60		300
SPT-1	18	2+	.030 Plastic		60	75,90,105	300
SP-2	18-16	2+	.045 Rubber		60		300
SPT-2	18-16	2+	.045 Plastic		60	75,90,105	300
SP-3	18-12	2+	.060 Rubber++		60		300
SPT-3	18-10	2+	.060 Plastic++		60	75,90,105	300
TS	27(Tinsel)	2	.015 Rubber	.030 Rubber	60		125
TST	27(Tinsel)	2	.015 Plastic	.030 Plastic	60		125
SV	18	2+	.015 Rubber	.030 Rubber	60	75,90	300
SVO*	18	2+	.015 Rubber	.030 Neoprene	60	75,90	300
SVT	18-17	2+	.015 Plastic	.030 Plastic	60	75,90,105	300
SVTO*	18-17	2+	.015 Plastic	.030 Plastic	60	75,90,105	300
SJ	18-10	2-6	.030 Rubber++	.030 Rubber++	60	75,90	300
SJO*	18-10	2-6	.030 Rubber++	.030 Neoprene++	60	75,90	300
SJT	18-10	2-6	.030 Plastic++	.030 Plastic++	60	75,90,105	300
SJTO*	18-10	2-6	.030 Plastic++	.030 Plastic++	60	75,90,105	300
S	18-2	2 or more	.030 Rubber++	.060 Rubber++	60	75,90	600
SO	18-2	2 or more	.030 Rubber++	.060 Neoprene++	60	75,90	600
ST	18-2	2 or more	.030 Plastic++	.060 Plastic++	60	75,90,105	600
STO*	18-2	2 or more	.030 Rubber++	.060 Plastic++	60	75,90,105	600
SRD≠	18-4	3 or 4	.045 Plastic	.060 Rubber	60		300
SRDT≠	18-4	3 or 4	.045 Rubber	.060 Plastic	60	90	300
HPN(Flat)	18-12	2+	.045 Neoprene++		90	75,90,105	300
HPD	18-12	2,3,4	.030 Neoprene++	Yam Braid	90	75,90	300
HSJ	18-12	2,3,4	.030 Neoprene++	.030 Rubber	90		300
HSJO	18-12	2,3,4	.030 Neoprene++	.030 Neoprene	90		300
HS	14-12	2,3,4	.045 Neoprene	.060 Rubber	90		300
HSO	14-12	2,3,4	.045 Neoprene	.060 Neoprene	90		300

* Types SVO, SVTO, SJO, SJTO, SO, STO, HSO and HPN have jackets which are also recognized for oil resistance at 60°C and lower temperatures.

** Types SJ, SJO, SJTO, S, SO, ST and STO may be made with water-resistant insulation with "WATER RESISTANT" printed on the jacket.

** TYPES SJO, SJT, SJTO, SO, ST, STO, SPT-1 and SPT-2 may be made for outdoor use, with "W" printed on the jacket after the Type designation (example: TYPE SJTW)

** Types TPT, SPT-1, SPT-2, SPT-3, HPN, SVO, SJO, SJTO, SO, ST and STO (the parallel conductor types are limited to two-conductor construction) may be made in retractile form.

** Types SV, SVO, SVT, SVTO, SJ, SJT, SJTO, S, SO, ST and STO may be made with foil, serve, or braid shields under the jacket and are printed "SHIELDED"

*** Temperature ratings higher 60°C are printed on jacket except for heater cordage Types HPN, HPN and HPD heater cordage are rated 90°C for core only, 60°C (or special 75°C and 90°C) for jacket only.

+ Also recognized by Underwriters' Laboratories, Inc. in three conductors when the third conductor (with green insulation) is used for appliance or equipment grounding.

+ = Insulation and jacket thickness depend on cord size. Thickness shown are for 18 and 16 AWG.

1 Note SRD or SRDT-3-conductor versions can be made in braidless parallel construction with .110 nominal insulation.



YFC-BONEAGLE

TECHNICAL INFORMATION

U.L. Cord type designation

XT	Christmas Tree Thermoplastic	SJOO	SJO with Oil-Resistant Insulation
TPT	Tinsel parallel Thermoplastic	SJT	Service Junior Thermoplastic
TS	Tinsel Service	SJTO	SJT with Oil-Resistant Jacket
TST	Tinsel Service Thermoplastic	SJTOO	SJTO with Oil-Resistant Insulation
SPT-1	Service Parallel Thermoplastic-1/64"Insulation	SJE	Service Junior Elastomer
SPT-2	Service Parallel Thermoplastic-2/64"Insulation	SJEO	SJE with Oil-Resistant Jacket
SPT-3	Service Parallel Thermoplastic-3/64"Insulation	SJEOO	SJEO with Oil-Resistant Insulation
SPE-1	Service Parallel Elastomer-1/64" Insulation	S	Service
SPE-2	Service Parallel Elastomer-2/64" Insulation	SO	Service with Oil-Resistant Jacket
SPE-3	Service Parallel Elastomer-3/64" Insulation	SOO	SO with Oil-Resistant Insulation
SV	Service Vacuum	ST	Service Thermoplastic
SVO	Service Vacuum Oil-Resistant Jacket	STO	ST with Oil-Resistant Jacket
SVOO	SVO with Oil-Resistant Insulation	STOO	STO with Oil-Resistant Insulation
SVT	Service Vacuum Thermoplastic	SE	Service Elastomer
SVTO	SVT with Oil-Resistant jacket	SEO	SE with Oil-Resistant Jacket
SVTOO	SVTO with Oil-Resistant Insulation	SEOO	SEO with Oil-Resistant Insulation
SVE	Service Vacuum Elastomer	HPN	Heater Parallel Neoprene
SVEO	SVE with Oil-Resistant Jacket	HSJ	Heater Service Junior
SVEOO	SVEO with Oil-Resistant Insulation	HSJO	HSJ with Oil-Resistant Jacket
SJ	Service Junior	HS	Heater Service
SJO	SJ with Oil-Resistant Jacket	HSO	HS with Oil-Resistant Jacket

NOTE: Service parallel types-wall thickness for integral construction includes insulation and jacket combined. Elastomer is thermoplastic material with elastomeric properties similar to rubber.

U.L. Flexible Cordage Current Carrying Capacity In Amperes

AWG	Tinsel Cord	Rubber and Plastic Cords	Heater Cords
27	0.5	---	---
18	---	10	10
17	---	---	12
16	---	13	15
14	---	18	20
12	---	25	30
10	---	30	---
8	---	40	---
6	---	55	---
4	---	70	---

*Underwriters Laboratories, Inc., & National Electrical Code Standard for 2 and 3 conductor cords. For cord with 4 or 6 conductor, the current rating is 80% of the values shown.

INTERNATIONAL CORDAGE

Generally, there are two main cordage types used in the world: The American Wire Gauge (AWG) system used in North America, and the European Harmonized types used in Europe. In AWG system, the cordage is described in terms of wire gauge size such as 16 or 18 AWG, while a Harmonized cordage is expressed by means of mm² (an 18 AWG conductor is comparable to 0.75mm²).

CONDUCTOR COLOUR CODES

	North America	Harmonized	China
L=Line(Hot)	Black	Brown	Brown
N=Neutral	White	Blue	Blue
E=Earth(Ground)	Green	Green/Yellow	Green; Green/yellow
4th Conductor	Red		
5th Conductor	Yellow		
6th Conductor	Orange		

All information in this catalog is presented solely as a guide to product selection and is believed to be reliable. All printing errors are subject to correction in subsequent releases of this catalog. Although YFC-BonEagle has taken precautions to ensure the accuracy of the product specifications at the time of publication, the specifications of products contained herein are subject to change without notice. YFC-BonEagle products and the data herein are approximate and subject to normal manufacturing tolerances.